



The next generation of on-tank fuel polishing units

DIESEL DEFENCE DD50

On-tank fuel polishing

When diesel is bulk stored without treatment for extended periods it will become contaminated with water and particulates. This is harmful to an engine as it can clog filters, damage fuel injectors or cause total engine failure.

Diesel Defence on-tank fuel polishing systems offer a simple and reliable solution. Through a process of recirculation fuel is continually passed through a series of filters, removing the harmful contaminants and maintaining an optimum EN590 level of cleanliness.

With a flow rate of 50 litres per minute, the DD50 is recommended for tanks holding between 7,500 and 40,000 litres of fuel (dependent upon tank and fuel condition).

Removes water

Advanced water absorbing filters remove virtually all free and emulsified water which can damage engine injectors.

Removes bacteria and solid particulates

Single and multi-stage filtration removes solid and microbial contamination to 5 microns or less.

Reliable fuel quality

Fuel is maintained to surpass ISO 4406's 18/16/13 standard of cleanliness and EN590's 200ppm level of water content.



Product Datasheet

DIESEL DEFENCE DD50



- Long term protection for fuel
- Maintains the quality of stored diesel
- Improves the reliability of critical systems
- Treats the fuel before it reaches the engine or daytanks
- Circulates fuel to prevent build up of contamination in stagnant parts of the tank

Specifications

Performance and Features

Flow rate (litres per minute)	50
Suggested tank size (litres)	7,500 - 40,000
Voltage (volts)	110, 230 (nominal voltage)
Frequency (hertz)	50, 60 (nominal frequency)
Max. Variations	Voltage: +/- 5% Frequency: +/- 2% of nominal value
Nominal Motor Wattage	230V/50Hz/60Hz = 370W 110V/50Hz = 500W 110V/60Hz = 700W
Nominal Motor Current (Amp)	230V/50Hz/60Hz = 2.2 110V/50Hz = 5.5 110V/60Hz = 7.5
7-day timer	Yes
IP Rating of enclosure	65 (internal) / 55 (external)
Filter change alarm	Yes
Water in fuel alarm	Yes
Fuel bund alarm	Yes
Low flow rate alarm	Yes
E-stop alarm	Yes
Particulate filter (µm)	1, 5, 10, 25
Finishing filter (µm)	1, 5, 10, 25
ISO particle counter	No
Alarm beacon	Optional
Touch screen controller	Yes
Dimensions	1500mm(h) x 1000mm(w) x 400mm(d)

Standard Features

- Password-protected touch-screen controller
- Connection to Building Management System
- Particulate filter - 1, 5, 10 or 25 µm
- Finishing filter - as standard this is fitted with a water absorbing filter
- Fuel isolation solenoid valves
- Filter blocked/change alarm warning
- Water drain alarm warning
- Schneider controls

Optional Features


- Vented Enclosure (with extractor fan)
- External Alarm Beacon
- ISO Particle Counter
- Stainless steel enclosure
- Water coalescing filter (instead of standard water absorbing filter)

Additional Services

- DieselCheck Fuel Testing
- ClearTank Fuel Cleaning
- ADV Fuel Stabilisation



Layout

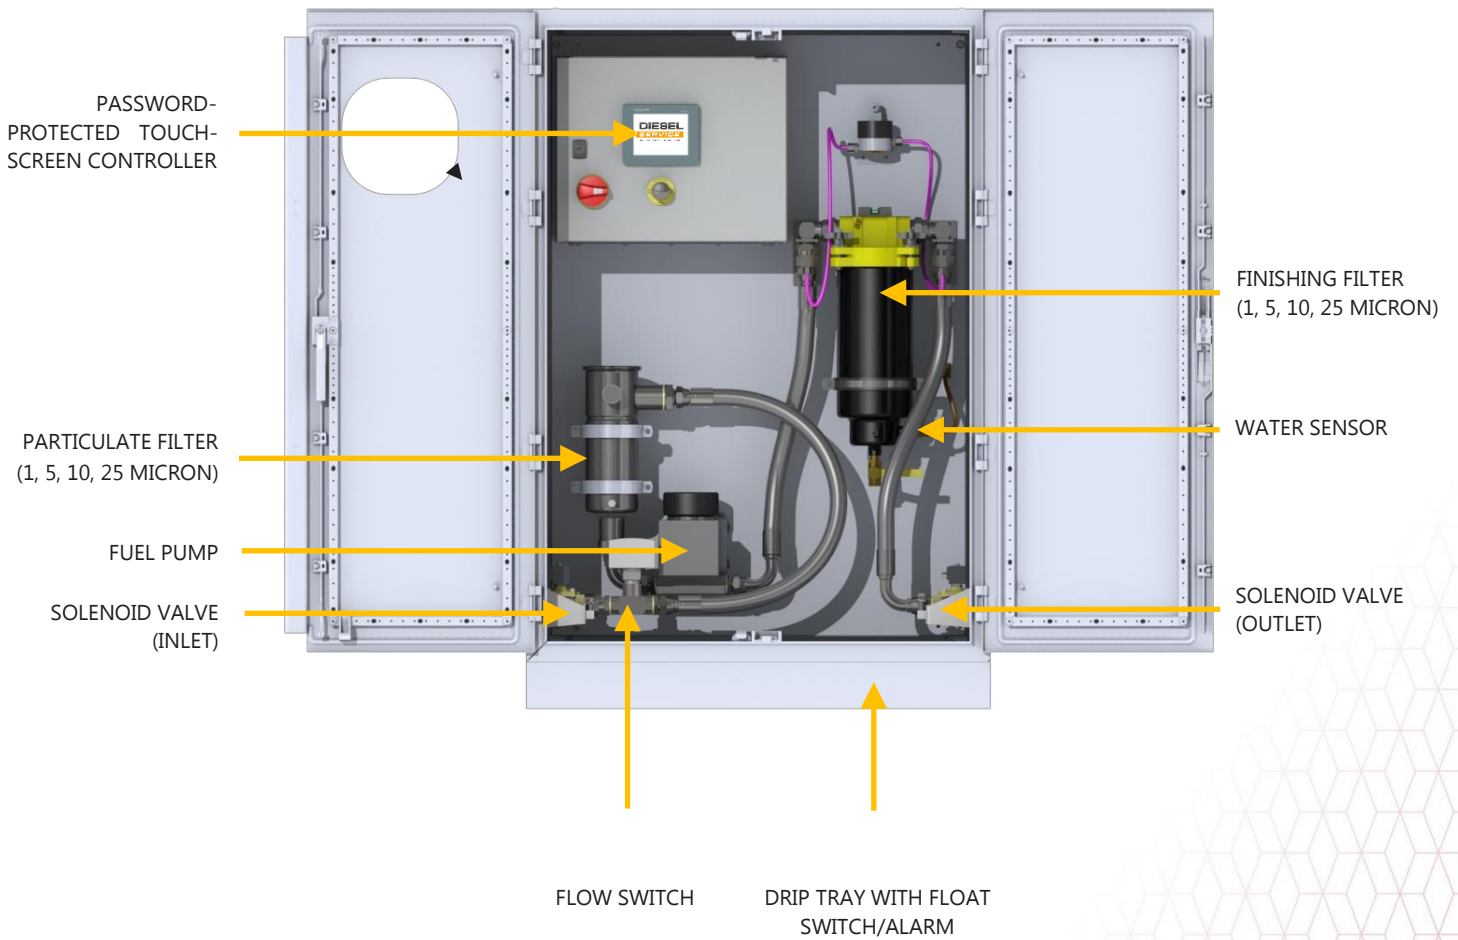



Protect your engine

DS Activity S.A.

Rue du Roua 70, 4140 Sprimont

Phone: +32 (0) 4 285 89 65

Fax: +32 (0) 367 16 66

Email: info@diesel-service.be

www.diesel-service.be
